Instruction Manual for Kick Starter Arm

Item No：０２－０８－００４３ (Chrome)
：０２－０８－００４８ (Black)

Applicable model names and the frame Nos:
Monkey・Gorilla ：Z50J-1300017～
：AB27-1000001～
Monkey (FI) ：AB27-1900001～

・Thank you for purchasing one of our TAKEGAWA products. Please strictly follow the instructions in installing and using the kit.
・Before installing the kit, please be sure to check the kit contents. Should you have any questions about the kit, please contact your local TAKEGAWA dealer.

◎ **Please note: Illustrations and photos may vary from actual hardware.**

Please read the following instructions before installation.

◎ We do not take any responsibility for any accident or damage whatsoever arising from the use of the products not in conformity with the instructions in the manual.
◎ You are kindly requested not to contact us about the combination of our products with other manufacturers'.
◎ This product is designed for exclusive use in the above-mentioned types of motorcycles and frame numbers only. Please take note that this product cannot be mounted on other types of motorcycles.
◎ For the proper use of this product, read carefully the "Precautions to take when kick-starting" on the next page. Otherwise, you may get injured.

⚠ CAUTION The following show the envisioned possibility of injuries to human bodies and property damage as a result of disregarding the following cautions.

- Do the installation with right tools. (Otherwise, breakage of parts or injuries to you may take place.)
- Always use a torque wrench to screw bolts and nuts tight and securely to the specified torque. (Otherwise, these parts may get damaged or fall off, resulting in accidents.)
- As some products and frames have sharp edges or protruding portions, please work with your hands protected. (Otherwise, you will suffer injuries.)
- Before riding, always check every hardware like screws for slack. If you find slack ones, screw them securely up to the specified torque. (Otherwise, improper tightening may cause parts to come off.)
- Be careful in pressing down on the kick starter arm. (Otherwise, you may get injured.)
- Never install this arm on a motorcycle fitted with a racing inner rotor. (Otherwise, the kick starter arm may get damaged or you may get injured.)
- Never use this arm on any other motorcycles than those specified above. (Otherwise, such use could cause technical troubles.)
- For the proper use of this product, read carefully the "Precautions to take when kick-starting" on the next page. (Otherwise, you may get injured or parts may get damaged.)

⚠ WARNING The following show the envisioned possibility of human death or serious injuries to human bodies as a result of disregarding the following warnings.

- When you notice something abnormal with your motorcycle while riding, immediately stop riding and park your motorcyle in a safe place to check what has gone wrong. (Otherwise, the abnormality could lead to accidents.)
- Before doing work, make sure your motorcycle is secure on level ground for safety's sake. (Otherwise, your motorcycle could overturn and injure you while you are working.)
- Check or carry out maintenance of your motorcycle correctly according to the procedures in the instruction manual or service manual. (Improper checking or maintenance could lead to accidents.)
- If you find damaged parts when checking and performing maintenance of your motorcycle, do not use these parts any longer, and replace them with new ones. (The continued use of these damaged parts as they are could lead to accidents.)
- NEVER use a damaged kick starter arm, and replace it with a new one. (Otherwise, the kick starter arm may get broken, causing injuries to you.)

◎ Please be informed that, mainly because of improvement in performance, design changes, and cost increase, the product specifications and prices are subject to change without prior notice.
◎ This manual should be retained for future reference.

～Kit Contents～

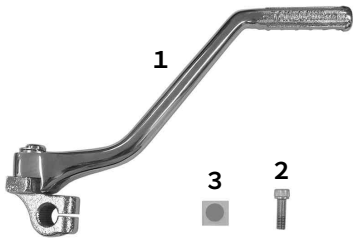

No.	Parts Name	Qty
1	Kick starter arm COMP.	1
2	Socket cap screw, 6 x 20	1
3	Cushion	1

Torque for a socket cap screw:
12.7 N・m (1.3 kgf・m)

In case the tip of the kick starter arm interferes with the catch tank or other parts, then fix the included cushion to the interfering portion.

Mar./17/ 10

～Precautions to take when installing and handling this product～

○ The location of the kick starter arm varies depending on the clutch cover shape. Install the arm at the place where it does not interfere with the said parts. However, if it interferes with something, fix the included cushion at the interfering portion.
Torque for a socket cap screw
12.7 N • m (1.3 kgf • m)

●Precautions to take when kick-starting:

○ Step on the kick starter arm as if stepping down on it from the rear side of the motorcycle to the front.
Be careful in pushing down on the starter arm, because depending on where to kick it down the hardest, the starter arm may fold up, causing injuries or damaging other parts.

Bad example:







NOTE that the arm is most likely to fold up when you press down on it hard towards the “TAKEGAWA” logo.

Good example.






Press down hard and forward through.

SPECIAL PARTS TAKEGAWA Co.,Ltd.
3-5-16 Nishikiorihigashi Tondabayashi Osaka Japan
TEL : 81-721-25-1357 FAX : 81-721-24-5059
URL : http://www.takegawa.co.jp